

In-Line Polarizer 1064nm 1310nm 1550nm 3W

Features

High Extinction Ratio, Low Insertion Loss ,High Return Loss

Applications

Communication Systems,Test Instrumentations ,Fiber Sensors Research



Performance Specifications


Parameters	Unit	Values
Center Wavelength	nm	1310, 1480 or 1550
Operating Wavelength Range	nm	±50
Typ. Insertion Loss at 23°C	dB	0.3
Max. Insertion Loss at 23°C	dB	0.5
Min. Return loss	dB	50
Typ. Extinction ratio at 23°C	dB	30
Min. Extinction ratio at 23°C	dB	28
Max. Optical Power (CW)	W	3
Max. Tensile Load	N	5
Fiber Type		PM Panda Fiber or SMF-28e
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85

*Above specifications are for devices without connectors.

*For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower and ER will be 2dB lower.

*The PM fiber and the connector key are aligned to the slow axis.

Size

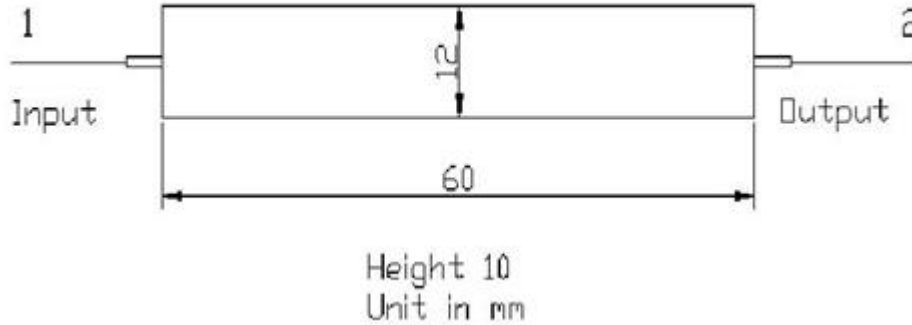

Ordering Information

ILP-①①-②②-③③-④④-⑤

①①: Wavelength

31 - 1310nm

48 - 1480nm

55 - 1550nm

SS - Specify

③③: Fiber Jacket on Port 1 & 2

B - 250um Bare Fiber

D - 400um Bare Fiber

L - 900um Loose Tube

S - Specify

④④: Fiber Type on Port 1 & 2

1 - PM Panda Fiber

2 - SMF-28e Fiber

⑤: Fibre Length

0.8 - 0.8m

②②: Connector Type on Port 1 & 2

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

S - Specify